



Saving Lives, Preventing Accidents, Everyday

CAR COMING Warning Sign

Description: Enhance pedestrian safety with our innovative wall-mounted car coming sign. Equipped with flashing text and voice alerts, it effectively warns pedestrians of vehicles exiting parking garages and blind spots, ensuring a safer environment for all.

Part name: Car Coming Warning Sign 4010
Part#: CC4010VW2

Solution

Warns pedestrians of a vehicle exiting a parking facility with Voice alert and flashing CAR COMING text.

Fully engineered kits ready to go out-of-the-box.


PAS-KITs include:

- PSC - Intelligent controller
 - 2 Inputs / 4 Outputs
 - Programmable
- Flashing LEDs
- Audio module with volume control
- Programmable audio cut-off timer
- Voice speaker
- Power supply
- Triggering devices

CAR COMING KIT

Wall Mount • 40" X 10" • 2-sided

P/N: CC4010VW2-KIT

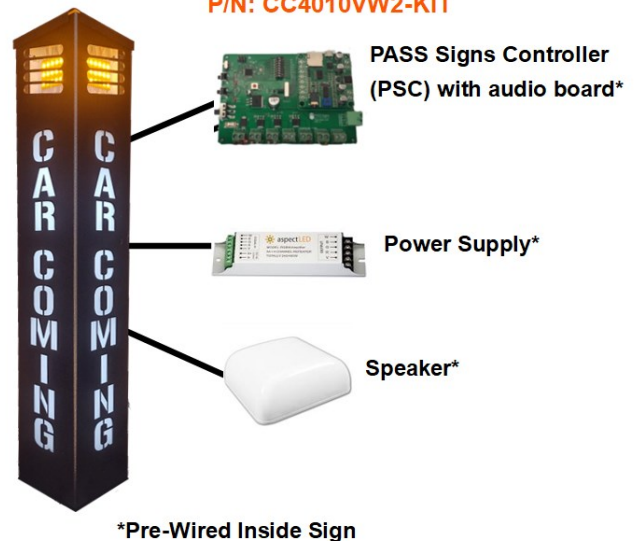

CAR COMING Warning Sign

KITS INCLUDES EVERYTHING YOU NEED FOR A WORKING SYSTEM**



Parking Alert Signs


Engineered safety systems for your parking facilities

Have questions?
We make it easy for you.
480-689-1993

support@passsigns.com

PassSigns.com

Dimensions & Views

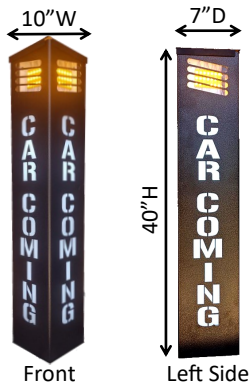

Hammered Copper
textured powder coating

Triggering Sensors

Multiple sensors can be connected to the same sign

- Vehicle motion detector
- Vehicle loop detector
- Parking gate open circuit
- Rollup door gate open circuit
- Beam detector
- Push button
- Any dry output

System Operations

A TRIGGERING SENSOR detects a vehicle exiting a facility. It sends a signal to the PASS Controller (PSC) inside the system. The PASS Controller (PSC) activates the system:

- Voice Alert—"Attention! Vehicles exiting watch for vehicles."
- Flashing text (2 sides) - CAR COMING
- Flashing amber signal at the top of the sign

PASS Controller continues to activate the sign for 10 seconds (programmable) or if a second vehicle activates the system it resets the 10 second timer.

Audio cut-off timer - The PSC has a programmable audio cut-off timer to allow for the audio alert to be silenced at designated times to not disturb nearby residential (example 8pm to 8am)

Detailed Specifications

Part name: Car Coming Warning Sign 4010

Part#: CC4010VW2 (see Kits below)

Sides: 2-Sides

Mounting: Wall or Post mounted, 40" clearance under

Dimensions: 40"H x 10"W x 6"D (8" faces)

Material and Rating: 14AWG Aluminum

Weather Rating: Outdoor Direct Weatherproof

Finish: Hammered copper textured powder coating

Power In: 100-240VAC, Other options available

NOTE— 40" CLEARANCE REQUIRED UNDER UNIT TO ALLOW FRONT COVER TO SLIDE DOWN

PASS Signs Controller (PSC) inside

Input power for PSC-Controller

(4) Programmable 12VDC outputs (Flashing or constant)


(2) Programmable dry inputs, (NO or NC)

Activation timer - 5 to 60 seconds

Audio cut-off timer

Audio module for voice or audio alerts, MP3 files

Typical wiring

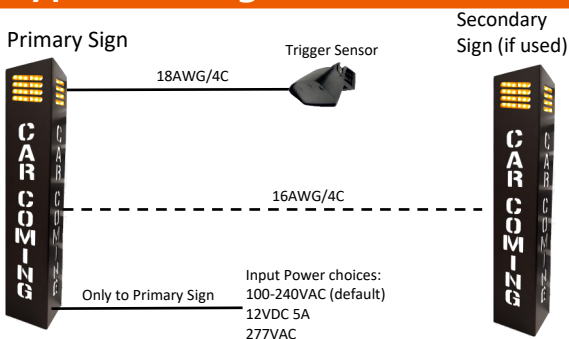

Part numbers

CC4010VW2-KIT (primary sign)	Primary sign with LEDs, PSC Intelligent controller, Audio module, Audio cut-off timer, Speaker, & Power supply
CC4010VW2-BASIC (secondary sign)	Secondary sign, LEDs & Speaker only. Use for exits wider than 25' if needed.
PS-VMD-DL (most common Triggering Sensor)	Vehicle Motion Detector, intelligent motion detector that detects direction and senses if the motion is from a pedestrian or vehicle

***system does not include field wiring or mounting bolts*