

CAR1806V3

Car Alley 1806 - Vehicle Exiting Sign

THE ENGINEERING IS DONE

Intelligent Warning Systems and Signs

Details

Part Number	CAR1806V3
Part Name	Car Alley 1806 - Vehicle Exiting Sign
Type	Vehicle Exiting Signs
Dimensions	18"H x 6"W x 8"D 3-Sided Text
Material	14AWG Aluminum
Finish	Powder coated, hammered copper
Rating	Outdoor rated - direct weather
Controller	PSC-5 Sign Control Board

- Engineered Kits on back page
- Clear flashing text and voice alerts
- Programmable nighttime audio cut-off timer
- Warn pedestrians of vehicles exiting
- Lower your facility risk and save lives
- Add *Stop and Look for Pedestrians* crossing sign to warn drivers of pedestrians

Solution

Warns pedestrians of vehicles exiting alleys, compact parking exits, blind driveways, and tight drive lanes using a compact illuminated sign and voice alert.

Description

The Car Alley Exit Warning Sign 1806 alerts pedestrians to approaching vehicles with flashing "CAR" displays and voice warnings. Powered by the PSC Intelligent Controller, it supports programmable outputs, activation timers, and audio cut-off timers. Built for compact vehicle exit areas, it is sensor-compatible and ready for parking facility, alley, and blind-exit installations.

Operations

The Sign uses a Trigger Device to activate the system. When activated the CAR text flashes and the audio plays, "Attention! Vehicle exiting, watch for vehicles." The sign stays activated for 10 Seconds (adjustable) until the Activation Timer ends. If another vehicle exits during this period, the Activation Timer will restart. Audio Cut-Off Timer: Audio can be programmed to turn off audio at designated times for nearby residential.

CAR Alley Exit 1806
Single alley or blind corner warning exit system
P/N: CAR1806V3

18.00"
6.00"

CAR

PSC-5 CENTRAL CONTROLLER
Manages signs, audio alerts and vehicle detection

INTEGRATED AUDIO
Voice alerts with volume control and programmable night timers for quiet hours

POWER SUPPLY
100-277VAC Input
12VDC Output

SYSTEM TRIGGERS
Activate the sign with one of the following triggers

- Vehicle motion detector - Decider2
- Vehicle loop detector - LD01
- Gate open output
- Presence Detector - EchoSense20

CAR ALLEY EXIT 1806 SINGLE SIGN

- 18" Tall x 6" Wide
- Illuminate 3-Sided Display
- High-Visibility Amber LEDs
- Integrated Audio Alerts
- Built for Long-Term Outdoor Performance

Wall or Post mounted units

Additional signs and sensors can be added

Integrated audio alerts

ENGINEERED FOR RELIABILITY


- ✓ All-in-one solution for vehicle detection and driver alerts
- ✓ Easy installation with pre-wired components
- ✓ Weather-resistant components

Includes

- (1) CAR1806V3 Car Alley Sign with LEDs and SP2 20W Speaker
- (1) PSC-5, Control Board with Audio
- (1) PS126 Power Supply 100-240VAC to 12VDC
- No trigger device
- Add additional signs and sensors if needed**

Common Cabling

CAR1806VW3-KIT common cabling for single ser

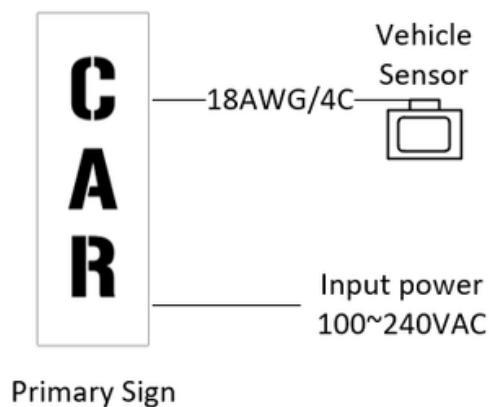

Application

- Alley exits
- Small parking lot exits
- Blind driveways
- Compact vehicle exits
- Sidewalk crossings
- Ramp exits

Triggers Accessories

Decider2
LD-01
PS-Narrow


SALFP1812
EP720404
SP1-Speaker



Engineered Kits

CAR Alley Exit 1806

Single alley or blind corner warning exit system

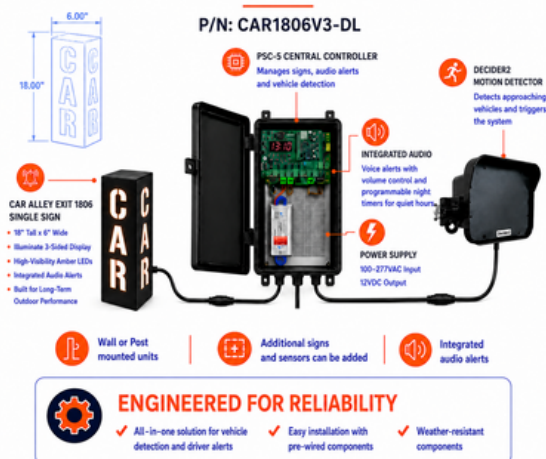

CAR Alley Exit 1806

Dual signs for wide alleys and blind exits

