



CC4010V2

Car Coming 4010 - Vehicle Exiting Sign

THE ENGINEERING IS DONE Intelligent Warning Systems and Signs

Details

Part Number	CC4010V2
Part Name	Car Coming 4010 - Vehicle Exiting Sign
Type	Vehicle Exiting Signs
Dimensions	40"H x 10"W x 6"D 2-sided Text
Material	14AWG Aluminum
Finish	Powder coated, hammered copper
Rating	Outdoor rated - direct weather
Controller	PSC-5 Sign Control Board

- Engineered Kits on back page
- Clear flashing text and voice alerts
- Programmable nighttime audio cut-off timer
- Warn pedestrians of vehicles exiting
- Lower your facility risk and save lives
- Add *Stop and Look for Pedestrians* crossing sign to warn drivers of pedestrians

Solution

Warns pedestrians of vehicles exiting parking garages, blind exits, and drive lanes using a bright illuminated sign and voice alert.

Description

The Car Coming Exit Warning Sign 4010 alerts pedestrians to approaching vehicles with flashing "CAR COMING" displays and voice warnings. Powered by the PSC Intelligent Controller, it supports programmable outputs, activation timers, and audio cut-off timers. Built from durable 14AWG aluminum, it is weatherproof, sensor-compatible, and ready for parking facility installations.

Operations

The Sign uses a Trigger Device to activate the system. When activated the CAR COMING text flashes and the audio plays, "Attention! Vehicle exiting, watch for vehicles." The sign stays activated for 10 Seconds (adjustable) until the Activation Timer ends. If another vehicle exits during this period the Activation Timer, then the timer will restart.
Audio Cut-Off Timer: Audio can be programmed to turn off audio at designated times for nearby residential.

Parking Alert Signs
Engineered safety systems for your parking facilities

CAR COMING 4010

Vehicle Exiting Warning Sign with Control Board and Voice Alerts
P/N: CC4010V2

BUILT-IN CONTROL BOARD
PSC-5 board mounted inside the enclosure

INTEGRATED AUDIO
Loud, clear alerts increase driver awareness

INTEGRATED POWER SUPPLY
12V 6.3A LED Driver
RoHS Certified

CAR COMING 4010 SINGLE SIGN (x1)

- 40" Tall x 10" Wide
- Illuminated 2-Sided Display
- High-Visibility Amber LEDs
- Integrated Audio Alerts
- Built for Long-Term Outdoor Performance

SYSTEM TRIGGERS
Activate the sign with one of the following triggers

- Vehicle motion detector - Decider2
- Vehicle loop detector - LD01
- Gate open output
- Presence Detector - EchoSense20

Wall or Post mounted units
 Integrated audio alerts
 Additional signs and sensors can be added

ENGINEERED FOR RELIABILITY


- ✓ All-in-one solution for vehicle detection and driver alerts
- ✓ Easy installation with pre-wired components
- ✓ Weather-resistant components built for long-term performance

Includes

- (1) CC4010V2 Car Coming Sign with LEDs and SP2 20W Speaker
- (1) PSC-5, Control Board with Audio
- (1) PS126 Power Supply 100-240VAC to 12VDC
- No trigger device
- Add additional signs and sensors as needed**

Common Cabling

CC4010V2 common cabling for single sensor and flashing STOP Sign

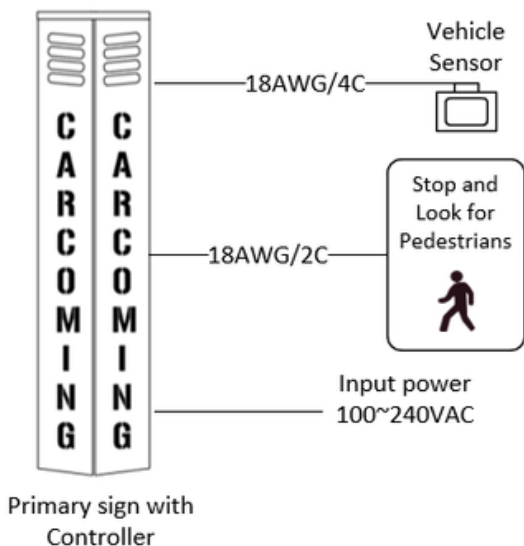

Application

- Parking garage and lot exits
- Blind exit plazas
- Mixed pedestrian and vehicle areas
- Vehicle ramps

Triggers

- Decider2
- LD-01
- PS-Narrow

Accessories

- SALFP1812
- EP720404
- SP1-Speaker



Engineered Kits

