





**Saving Lives, Preventing Accidents, Everyday**

## Minimize Your Liability!

**Engineered Kit Includes :**



PASS Signs Controller (PSC) with audio board\* And Power Supply in outdoor enclosure



Speaker



Vehicle Motion Detector

**Part name:** Car Coming Warning Post 48x07  
**Part numbers:** CCV4807G or CCV4807G-Kit  
**Mounting:** Ground or Pedestal, outdoor rated  
**Purpose:** Provides pedestrians a visual and voice alert when vehicles exit a parking facility. Three sides flash "CAR COMING". One side flashes "GO SLOW" to warn exiting drivers to slow down.

**Engineered Kit Includes:**

- PASS Controller w/ Voice Module
- Power supply
- Speaker
- Vehicle motion detector
- Dimensions:** 48"H x 7"W

## Solution

**Warns pedestrians of a vehicle exiting a parking facility, with Voice Alert and Flashing CAR COMING Reminds driver to GO SLOW**

## CAR COMING Exit Warning Post

**INCLUDES EVERYTHING YOU NEED FOR A WORKING SYSTEM\***



**Parking Alert Signs**  
Engineered safety systems for you parking facilities

Have questions?  
We make it easy for you.  
480-689-1993  
support@passigns.com

**PassSigns.com**

## Operations

### How the System Operates


A TRIGGERING SENSOR detects a vehicle exiting a parking facility. It sends a signal to the PASS Controller (PSC) inside the System.

The PASS Controller (PSC) activates the system:

- Voice Alert—"Attention! Vehicles exiting watch for vehicles."
- Flashing text (3 sides) - CAR COMING
- Flashing Text (1 side) - GO SLOW (towards driver)
- Flashing amber signal

PASS Controller continues to activate the sign for 10 seconds (adjustable) or if a second vehicle activates the system it resets the 10 second timer.

### Typical Wiring

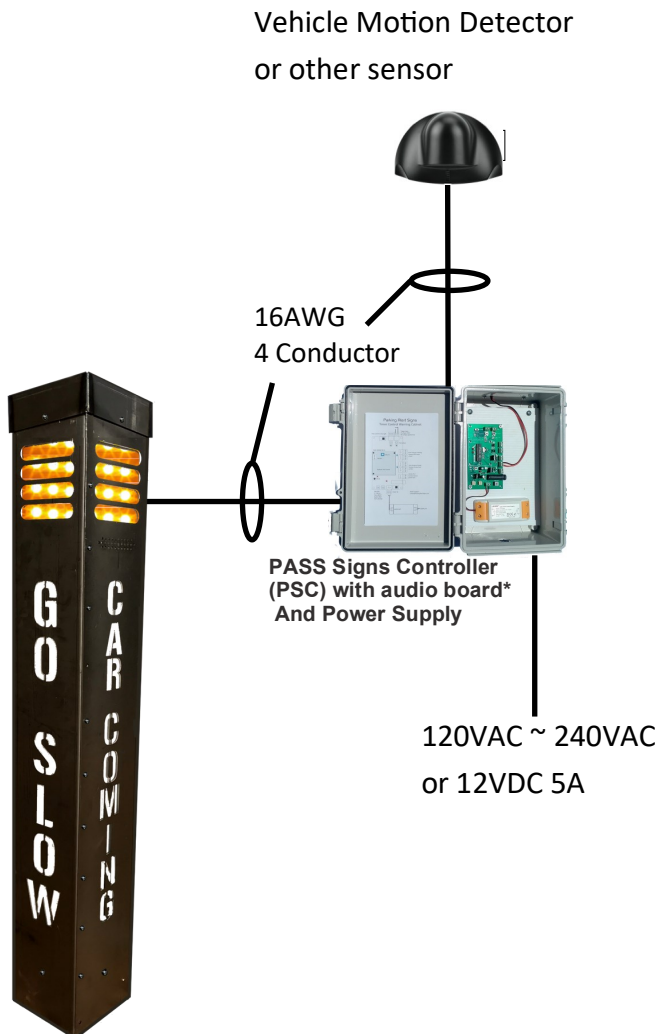

## Triggering Sensors

- Vehicle motion detector (INCLUDED with Kit)
- Vehicle loop detector
- Parking gate open circuit
- Rollup door gate open circuit
- Beam detector
- Push button
- Any NORMALLY OPEN output

### Options

- Audio cut off timer board. Turns off voice alert at designated times for nearby residential.
- 2nd Sign for exits wider than 2 lanes — Car Coming Sign Warning Post CCV4807G-Basic

### Detailed specifications

**Part name:** Car Coming Warning Post 48x07

**Part#:** CCV4807G or CCV4807G-Kit

**Mounting:** Ground or Pedestal

**Dimensions:** 48" x 7" x 7"

**Material:** 14AWG Steel

**Finish:** Hammered copper powder coating

**Power In:** 120VAC 1A or 12VDC 5A(Low voltage)

#### PASS Signs Controller (PSC)

12VDC Input Power

12VDC Output Power (for Trigger Sensor)

(2) Trigger Inputs - Normally open dry inputs only

(2) Test buttons

Output 1: Steady Output 12VDC

Output 2: Flashing 1 sec On/Off Output—12VDC

Activation Timer (5—35 seconds) - Dip switches

#### Voice Module

Volume control 0-90dB

15 Watt Speaker

Audio Message can be changed easily onsite with laptop and USB to Micro USB cable (android cable)

#### Vehicle Motion Detector with Kit

10'x10' detection zone

Power In: 12VDC from PASS Controller

*\*system does not include field wiring or mounting bolts*